





Action: Sand repair area.
Use: OSP 3 Disc.




Action: De-grease and tack repair area.

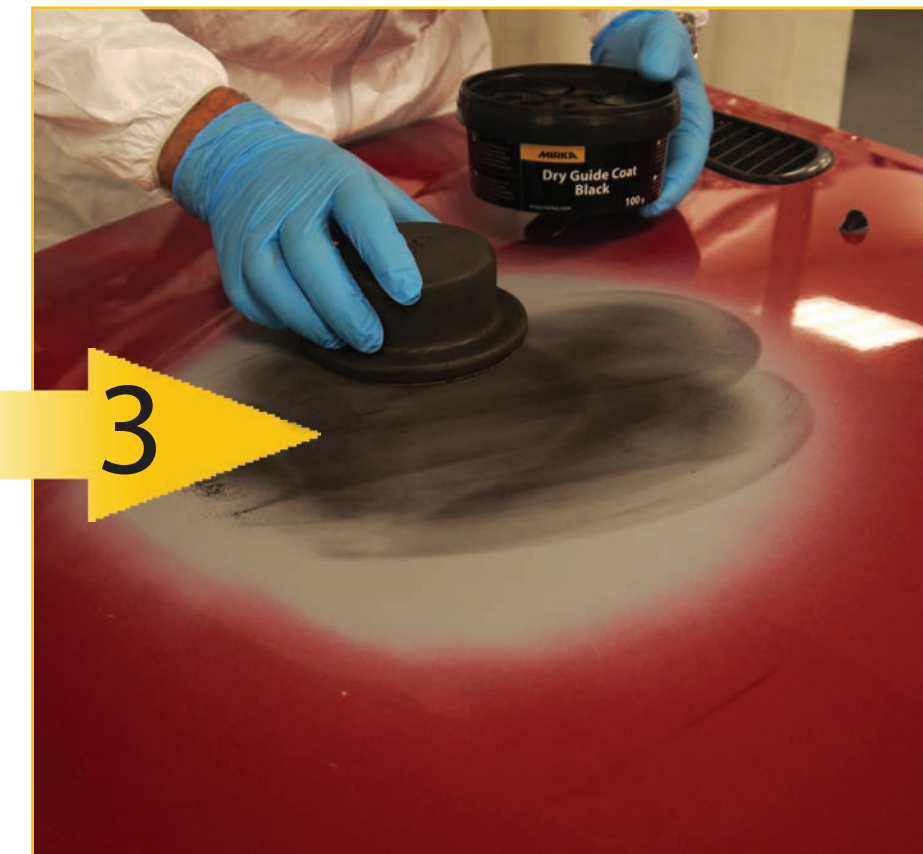

Action: Apply Dry Guide Coat to primed area.
Use: Mirka Dry Powder Guide Coat.

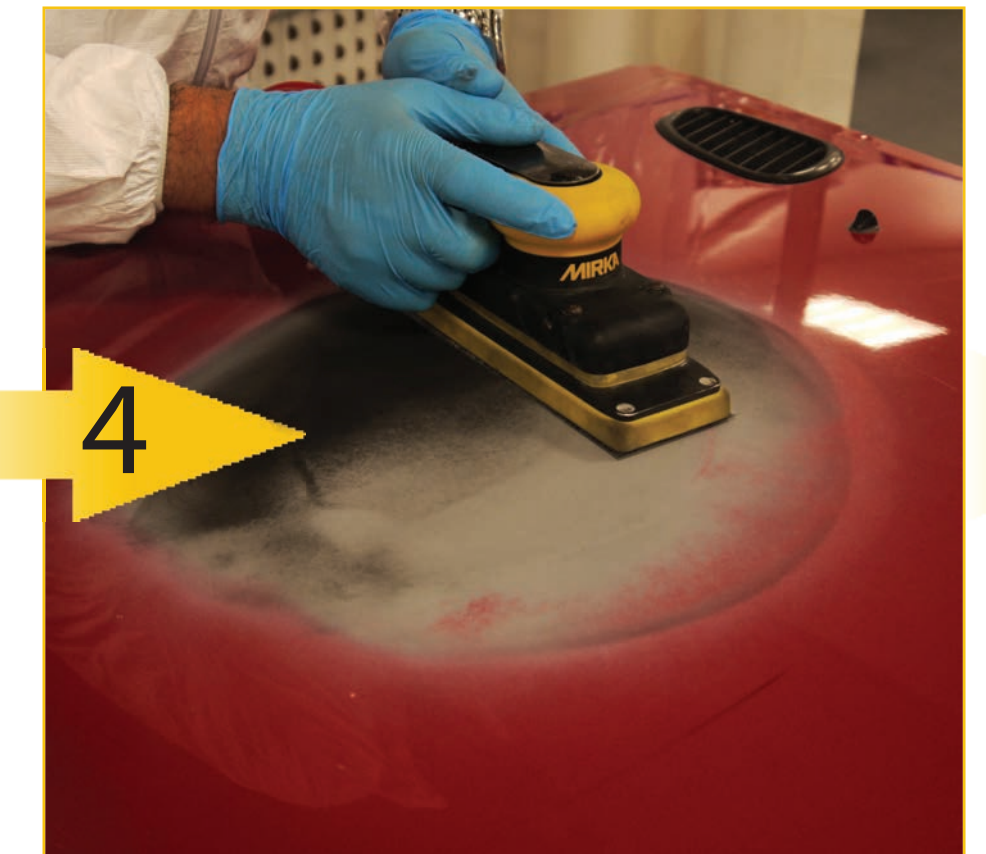


Action: Sand primed area.
Use: OSP 3 strip

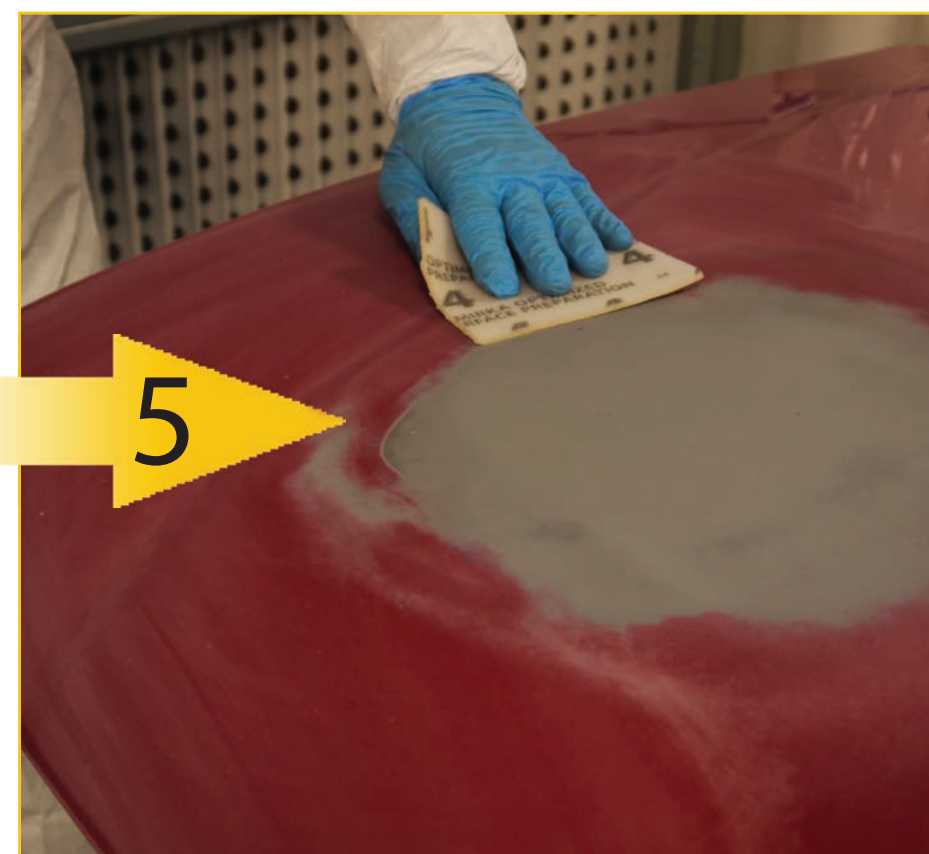

Action: Sand awkward areas.
Use: Mirka OSP Hand Pad.



Action: Re-apply Mirka Dry Guide Coat and machine sand primer.
Use: Mirka OSP 4 Disc.

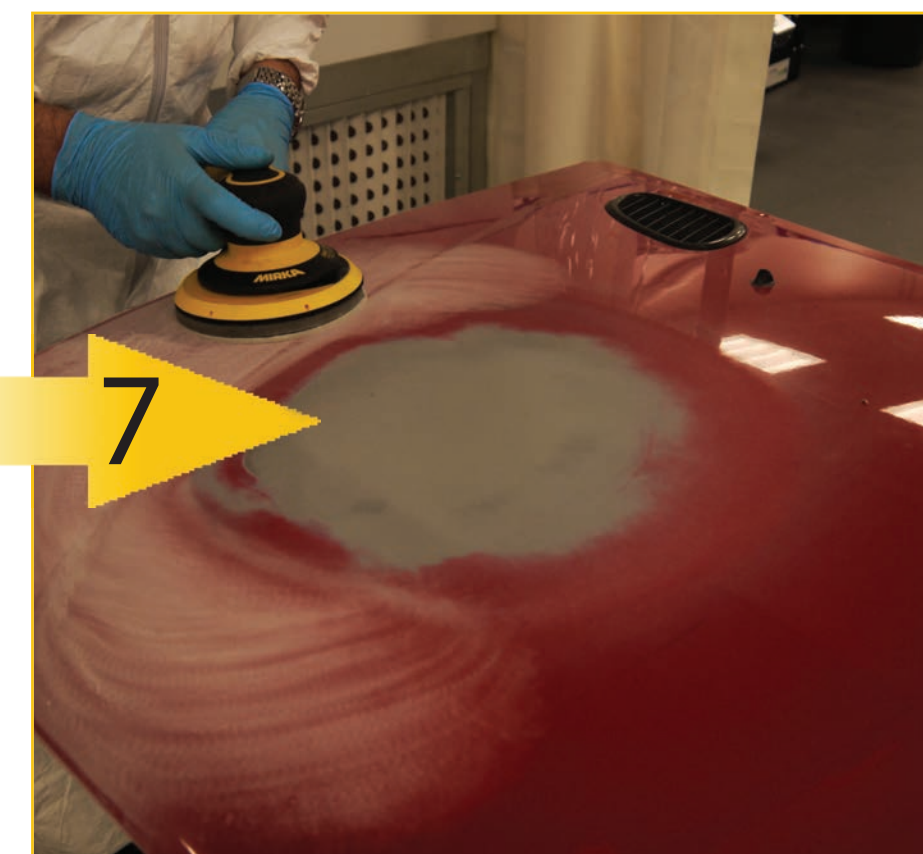

Action: Blend panels can be prepared by machine.
Use: Mirka OSP 4 Disc with Interface pad.



Action: De-grease, inspect repair and move to paint.