


Mirka Hoses & Adapters



All adapters shown on this overview are included in the box with the particular hose. Only exception is parts with separate Mirka code. The adapters 1–12 can also be ordered as spareparts.


Mirka® DEROS | DEOS | LEROS

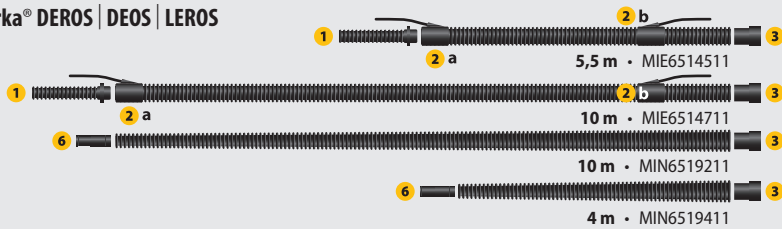

Can be cut into desired length and connected to MIN6519211 and MIN6519411 hose.

10 m extension hose • MIN6519711 • Remove 3 and connect with 8

Mirka® CEROS




Can be cut into desired length and connected to MIN6519211 and MIN6519411 hose.

10 m extension hose • MIN6519711 • Remove 3 and connect with 8

Miro 955® | 955®-S




Mirka® PROS | ROS | OS CV

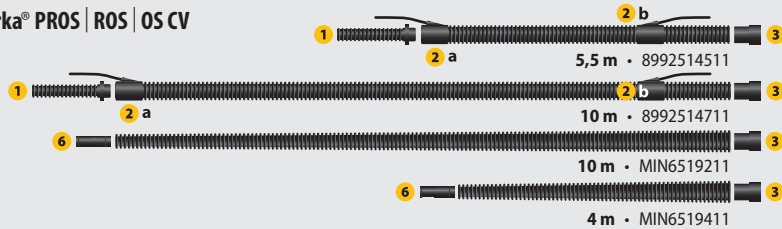

Can be cut into desired length and connected to MIN6519211 and MIN6519411 hose.

10 m extension hose • MIN6519711 • Remove 3 and connect with 8


Hand Sanding Blocks

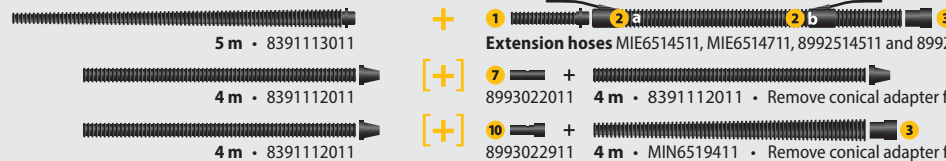

Extension hoses MIE6514511, MIE6514711, 8992514511 and 8992514711 • Remove 1

8993022011 4 m • 8391112011 • Remove conical adapter from 4 m and connect with 7


8993022911 4 m • MIN6519411 • Remove conical adapter from 4 m and connect with 10



Can be cut into desired length and connected to MIN6519211 and MIN6519411 hose.


10 m extension hose • MIN6519711 • Remove 3 and connect with 8

Deco-sander®



Can be cut into desired length and connected to MIN6519211 and MIN6519411 hose.

10 m extension hose • MIN6519711 • Remove 3 and connect with 8

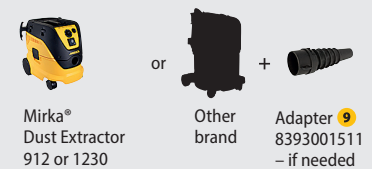

Mirka® DEROS DEOS LEROS • Hose diameters (Ø)		Ø to Sander (mm)		Ø to Dust Extractor (mm)	
		Inner	Outer	Inner	Outer
MIE6514511	Hose* 27 mm x 5,5 m • with intergrated cable • CE 230 V	25	27 / 32	32	34 / 40
MIE6514711	Hose* 27 mm x 10 m • with intergrated cable • CE 230 V	25	27 / 32	32	34 / 40
MIN6519411	Hose* 27 mm x 4 m + Connector	25	27 / 32	32	34 / 40
MIN6519211	Hose* 27 mm x 10 m + Connector	25	27 / 32	32	34 / 40

Mirka® CEROS • Hose diameters (Ø)		Ø to Sander (mm)		Ø to Dust Extractor (mm)	
		Inner	Outer	Inner	Outer
MIN6519411	Hose* 27 mm x 4 m + Connector	25	27 / 32	32	34 / 40
MIN6519211	Hose* 27 mm x 10 m + Connector	25	27 / 32	32	34 / 40
MIN6519711	Extension hose* • 32 mm x 10 m Can be cut into desired length and connected to the MIN6519411 and MIN6519211 hoses.	–	–	32	34 / 40


Miro 955® 955®-S • Hose diameters (Ø)		Ø to Sander (mm)		Ø to Dust Extractor (mm)	
		Inner	Outer	Inner	Outer
8394010311	Hose** for Miro 955®/955®-S	31	40	–	–

Mirka® PROS ROS OS CV • Hose diameters (Ø)		Ø to Sander (mm)		Ø to Dust Extractor (mm)	
		Inner	Outer	Inner	Outer
8992514511	Hose* 27 mm x 5,5 m • with integrated pneumatic	25	27 / 32	32	34 / 40
8992514711	Hose* 27 mm x 10 m • with integrated pneumatic	25	27 / 32	32	34 / 40
MIN6519411	Hose* 27 mm x 4 m + Connector	25	27 / 32	32	34 / 40
MIN6519211	Hose* 27 mm x 10 m + Connector	25	27 / 32	32	34 / 40




Hand Sanding Blocks • Hose diameters (Ø)		Ø to Sander (mm)		Ø to Dust Extractor (mm)	
		Inner	Outer	Inner	Outer
8391113011	Hose* 20 mm x 5 m • for Hand Sanding Blocks	20	22 / 26	–	–
8391112011	Hose 20 mm x 4 m • for Hand Sanding Blocks	20	22 / 26	–	–
MIN6519411	Hose* 27 mm x 4 m + Connector	25	27 / 32	32	34 / 40
MIN6519211	Hose* 27 mm x 10 m + Connector	25	27 / 32	32	34 / 40

Decosander® • Hose diameters (Ø)		Ø to Sander (mm)		Ø to Dust Extractor (mm)	
		Inner	Outer	Inner	Outer
MIN6519411	Hose* 27 mm x 4 m + Connector	25	27 / 32	32	34 / 40
MIN6519211	Hose* 27 mm x 10 m + Connector	25	27 / 32	32	34 / 40

Mirka® Cleaning Kit • Hose diameters (Ø)		Ø to Sander (mm)		Ø to Dust Extractor (mm)	
		Inner	Outer	Inner	Outer
8999799111	Clean-up kit for Dust Extractors	25	27 / 32	32	34 / 40

 *) electrical conductive ($\leq 10^6 \Omega/\text{square}$)
 **) antistatic ($\leq 10^{11} \Omega/\text{square}$)



Adapter	Description
8999804111* 	1 Hose Ø 27 mm x 0,5 m + Connector. This conductive adapter enables a quick change in-between Mirka power tools. Fix the adapter on each tool and connect/disconnect to/from any Mirka hose assembly with a Mirka branded adapter, both pneumatic: 8992514511, 8992514711 and electric: MIE6514511, MIE6514711.
8992515811* 	2 a Mirka Connector for Air + Electric Hoses. Comes with hose MIE6514511, MIE6514711, 8992514511 and 8992514711.
8992515911* 	2 b Connector for Air + Electric Hoses with threads. This adapter is close to the dust extractor, where the pneumatic tube/electrical cable comes out. Comes with hose MIE6514511, MIE6514711, 8992514511 and 8992514711.
8992515611* 	3 Hose adapter Ø 32 mm / 54 mm for Mirka® Dust Extractors. Comes with hose MIE6514511 / MIE6514511US, MIE6514711 / MIE6514711US, MIN6519411, MIN6519211, MIN6519711, 8992514511 and 8992514711. This adapter goes from the hose into the dust extractor.
8394020311** 	4 a b Hose Connector Kit No. 3–1 and 3–2 for Miro 955® & 955®-S. Adapter for both ends on the hose for Miro. Connector 4b: Ø 54 mm.
8391111111* 	5 Adapter Ø 20 mm / 28 mm for Mirka® Hand Sanding Blocks. Enables using the Ø 27 mm hoses (MIN6519411 and MIN6519211) together with the blocks.
8992515411* 	6 Soft Connector Ø 25,4 mm. Delivered together with hose MIN6519411 and MIN6519211. Enables connecting MIN6519411 and MIN6519211 hoses to Mirka Decosander®, Mirka Dust Suction Hood and sanders of other brands. Note! Not suitable for Mirka® CEROS or Mirka® ROS.
8993022011 	7 Hose Swivel Connector Ø 20 mm / 20 mm. Enables connecting two Ø 20 mm hoses. For example: 2 x Ø 20 mm hose x 4 m hose (8391112011).
8992515711* 	8 Hose Connector Ø 32 / 32 mm. Delivered together with extension hose MIN6519711. Enables connection with hose MIN6519411 and MIN6519211.
8393001511* 	9 Adapter Ø 30–48 mm for Dust Extractor. Can be cut to fit dust extractors of other brands.
8993022911 	10 Hose Swivel Connector Ø 20 / 25,4 mm. Enables connecting a Ø 20 mm hose with Ø 27 mm hose MIN6519411 and MIN6519211.
8999814111* 	11 Hose 20 mm x 0,5 m + Connector. This conductive adapter enables a quick change between Mirka power tools with 19 / 20 mm dust extraction fittings. Fix this adapter on each tool and connect / disconnect to / from any Mirka hose assembly.
8391111211 	12 Connector Air Inlet for Hand Sanding Block 20 / 20 mm. When fixed on a Mirka 20 mm dust extraction hose, this new connector enables a quick and smooth change of the hose from one Mirka hand sanding block to another. This connector enables adjusting the airflow.